

MICHELIN® XCA® TIRE



All-wheel position highway rib tire that helps deliver high mileage and excellent fuel economy in commercial applications.




MICHELIN® XCA® TIRE



COMMERCIAL TRUCK TIRE APPLICATIONS

All-wheel position highway rib tire that helps deliver high mileage and excellent fuel economy in commercial applications.

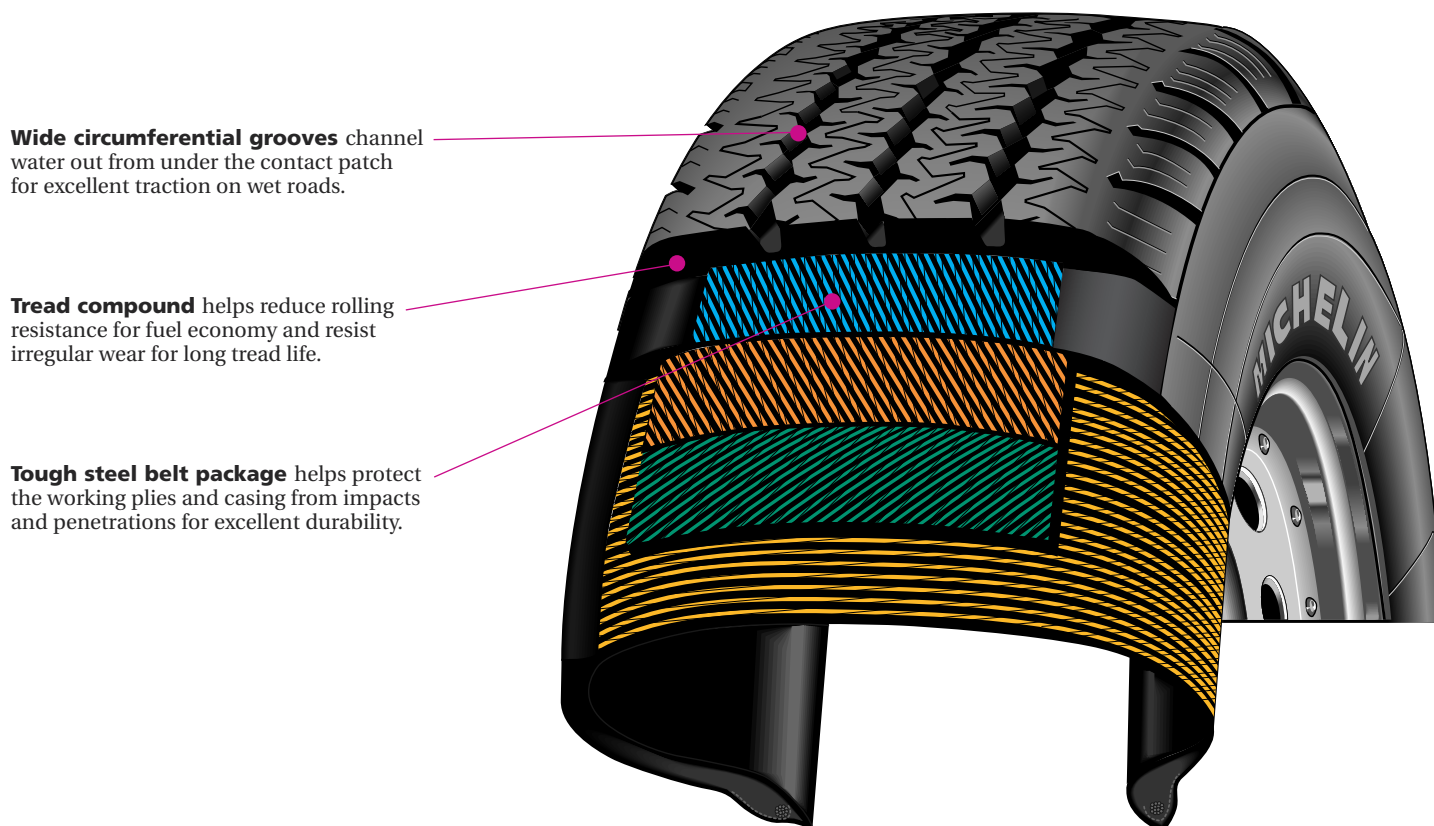

Size	Load Range	Catalog Number	Tread Depth	Max. Speed (*)	Loaded Radius		Overall Diameter		Overall Width		Approved Rim (4)	Min. Dual Spacing		Revs Per Mile	Max. Load and Pressure Single				Max. Load and Pressure Dual			
			32nds	mph	in.	mm	in.	mm	in.	mm		in	mm		lbs.	psi	kg.	kPa	lbs.	psi	kg.	kPa
7.50R17	D	23176	13	75	15.6	396	33.5	850	8.2	209	6.00	9.5	242	621	2800	75	1270	520	2600	75	1180	520

Note: Wheel listed first is the measuring wheel.

(*) Exceeding the lawful speed limit is neither recommended nor endorsed.

(‡) Overall widths will change 0.1 inch (2.5 mm) for each 1/4 inch change in wheel width. Minimum dual spacing should be adjusted accordingly.

MICHELIN® tires and tubes are subject to a continuous development program. Michelin North America, Inc. reserves the right to change product specifications at any time without notice or obligations. Please consult wheel manufacturer's load and inflation limits. Never exceed wheel manufacturer's limits without permission of component manufacturer.

www.michelintruck.com

United States

Michelin North America, Inc.
One Parkway South
Greenville, SC 29615
1-888-622-2306

Canada

Michelin North America (Canada), Inc.
2500 Daniel Johnson, Suite 500
Laval, Quebec H7T 2P6
1-888-871-4444

Mexico

Industrias Michelin, S.A. de C.V.
Av. 5 de febrero No. 2113-A
Fracc. Industrial Benito Juarez
7 6120, Querétaro, Qro. Mexico
011 52 442 296 1600